

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification :  
G03F 7/20, G02B 17/06, H01L 21/027

A1

(11) International Publication Number: WO 99/57606

(43) International Publication Date: 11 November 1999 (11.11.99)

(21) International Application Number: PCT/IB99/00752

(22) International Filing Date: 26 April 1999 (26.04.99)

(30) Priority Data: 98201484.7 6 May 1998 (06.05.98) EP

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7,  
Kista, S-164 85 Stockholm (SE).

(72) Inventor: BRAAT, Josephus, J., M.; Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL).

(74) Agent: COBBEN, Louis, M., H.; Prof. Holstlaan 6, NL-5656  
AA Eindhoven (NL).

(81) Designated States: JP, European patent (AT, BE, CH, CY, DE,  
DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: MIRROR PROJECTION SYSTEM FOR A SCANNING LITHOGRAPHIC PROJECTION APPARATUS, AND LITHOGRAPHIC APPARATUS COMPRISING SUCH A SYSTEM

(57) Abstract

A mirror projection system for use in a step-and-scan lithographic projection apparatus, in which a mask pattern (15) is repetitively scan-imaged on a number of areas of a substrate (20) by means of a beam (b) of EUV radiation, and having a cross section shaped as a segment of a ring, has six imaging mirrors (5-10). The design is such that an intermediate image is formed between the fourth (8) and the fifth mirror (9) from the object side (1), and the system has a relatively large working distance (c).

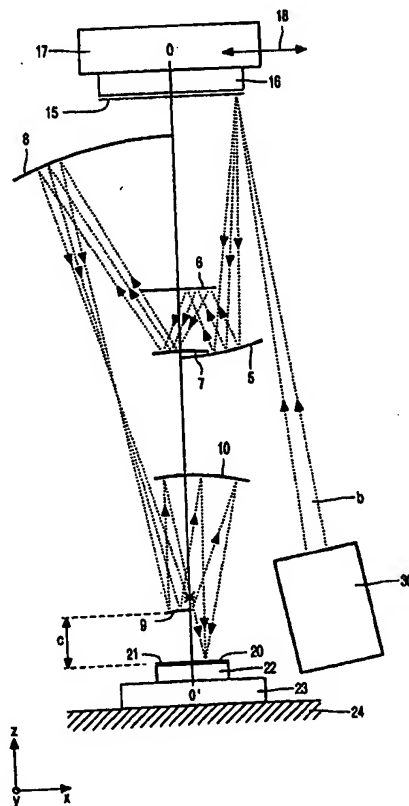

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Mirror projection system for a scanning lithographic projection apparatus, and lithographic apparatus comprising such a system.

The invention relates to a mirror projection system for use in a step-and-scan lithographic projection apparatus for imaging a mask pattern, present in a mask, on a substrate by means of a beam of EUV radiation, which beam has a circular segment-shaped cross-section, said projection system being constituted by six imaging mirrors having ordinal  
5 numbers 1-6 from the object side to the image side, the first, the second, the fourth and the sixth mirror being concave and the fifth mirror being convex.

The invention also relates to a lithographic apparatus for step-and-scan imaging of a mask pattern on a number of areas of a substrate, which apparatus comprises such a mirror projection system.

10 EP-A 0 779 528 describes a mirror projection system for use in a step-and-scan lithographic apparatus with which an IC mask pattern is imaged on a number of areas of a semiconductor substrate, using EUV radiation. EUV, extreme ultraviolet, radiation is understood to mean radiation having a wavelength in the range between several nm and several tens of nm. This radiation is also referred to as soft X-ray radiation. The use of EUV  
15 radiation provides the great advantage that extremely small details, of the order of  $0.1 \mu\text{m}$  or less, can be imaged satisfactorily. In other words, an imaging system in which EUV radiation is used has a very high resolving power without the NA of the system having to be extremely large, so that also the depth of focus of the system still has a reasonably large value. Since no suitable material of which lenses can be made is available for EUV radiation,  
20 a mirror projection system must be used for imaging the mask pattern on the substrate, instead of a hitherto conventional lens projection system.

The lithographic apparatuses currently used in the production of ICs are stepping apparatuses. In these apparatuses, a full field illumination is used, i.e. all areas of the mask pattern are illuminated simultaneously and these areas are simultaneously imaged on  
25 one IC area of the substrate. After a first IC area has been illuminated, a step is made to a subsequent IC area, i.e. the substrate holder is moved in such a way that the next IC area will be positioned under the mask pattern, whereafter this area is illuminated, and so forth until all IC areas of the substrate of the mask pattern are illuminated. As is known, it remains desirable to have ICs with an increasing number of components.

It is attempted to meet this desire not only by reducing the dimensions of these components but also by enlarging the surface areas of the ICs. This means that the, already relatively high, NA of the projection lens system must be further increased and, for a stepping apparatus, the image field of this system must also be further increased. This is  
5 practically impossible.

It has therefore been proposed to change from a stepping apparatus to a step-and-scan apparatus. In such an apparatus, a rectangular or circular segment-shaped sub-area of the mask pattern and hence also such a sub-area of an IC area of the substrate is illuminated, and the mask pattern and the substrate are moved synchronously through the  
10 illumination beam, taking the magnification of the projection system into account. A subsequent circular segment-shaped sub-area of the mask pattern is then imaged each time on a corresponding sub-area of the relevant IC area on the substrate. After the entire mask pattern has been imaged on an IC area in this way, the substrate holder performs a stepping movement, i.e. the beginning of a subsequent IC area is introduced into the projection beam  
15 and the mask is set to its initial position, whereafter said subsequent IC area is scan-illuminated via the mask pattern. This scan-imaging method may be used to great advantage in a lithographic apparatus in which EUV radiation is used as projection radiation.

The embodiment of the projection system described in EP 0 779 528, intended for use with EUV radiation having a wavelength of 13 nm has an NA of 0.20 at the  
20 image side. The annular image field has an inner radius of 29 mm and an outer radius of 31 mm and a length of 30 mm. The resolution of the system is 50 nm and the aberrations and distortions are sufficiently small to form a good image of a transmission mask pattern on an IC area of a substrate by way of a scanning process. The third mirror of this projection system is concave. A first pair of mirrors, consisting of the first and the second mirror,  
25 constitutes a magnified image of the object or the mask pattern. This image is transported by a second pair of mirrors, constituted by the third and the fourth mirror, and presented to a third pair of mirrors, constituted by the fifth and the sixth mirror, which provides the desired telecentric image with the required aperture  $NA = 0.20$ . In this projection system, an intermediate image is formed between the third and the fourth mirror, and a diaphragm is  
30 situated on the second mirror.

In the known projection system, the mirror sections which constitute the third and the fourth mirror must be located at a relatively large distance from the optical axis of the system. This may cause alignment and stability problems. Moreover, the known system has a small free working distance of the order of 17 mm. In practice, a larger

working distance is often required, for example, in connection with building in measuring systems.

It is an object of the present invention to provide a projection system of the type described in the opening paragraph, having a relatively large free working distance and being stable. To this end, the projection system according to the invention is  
5 characterized in that the third mirror is convex.

In the projection system in accordance with the novel concept, only one mirror element, the fourth mirror, is situated at a relatively large distance from the optical axis. The free working distance is, for example, a factor of six larger than that of the system  
10 described in EP-A 0 779 528. Now, an intermediate image is formed by the first four mirrors, which intermediate image is present at a position between the fourth and the fifth mirror. This intermediate image is directly imaged in the image plane by the fifth and the sixth mirror. In the novel projection system, the first mirror is placed close to the third mirror, whereas in the system in accordance with EP-A 0 779 528 the second mirror is  
15 placed close to the fourth mirror.

It is to be noted that US-A 5,686,728 describes a six-mirror projection system for a step-and-scan apparatus. However, this projection system is designed for wavelengths in the range between 100 nm and 300 nm, i.e. not for EUV radiation. In US-A 5,686,728 it is noted that such mirror projection systems are not suitable for EUV radiation.  
20 In the embodiment using six mirrors of the projection system described in US-A 5,686,728, the first mirror is convex.

Within the above-mentioned novel design of the projection system, there is still some freedom of choice of the parameters of numerical aperture, magnification and size of the image field.

25 An embodiment of the projection system is characterized in that the system has a numerical aperture of the order of 0.20 nm at the image side, a magnification  $M = +0.25$  and a circular segment-shaped image field having a width of 1.5 mm.

This projection system is suitable for imaging details having a size of the order of 50 nm.

30 The projection system is further preferably characterized in that all mirrors have aspherical surfaces.

An aspherical surface is understood to mean a surface whose fundamental shape is spherical but whose actual surface locally deviates from this fundamental shape so as to correct aberrations of the optical system of which this surface forms part.

By making all mirrors aspherical, a satisfactorily corrected system can be obtained with said image field and said numerical aperture.

The projection system is preferably further characterized in that it is telecentric at the image side.

5                   Consequently, magnification errors due to undesired displacements of the substrate along the optical axis can be avoided.

The projection system may be further characterized in that a physically accessible diaphragm is situated between the second and the third mirror.

10                   The system is then designed in such a way that there is sufficient space to provide a diaphragm at this position between the beams extending in opposite directions.

                  The invention also relates to a lithographic apparatus for step-and-scan imaging of a mask pattern, present in a mask, on a number of areas of a substrate, which apparatus comprises an illumination unit with a source for EUV radiation, a mask holder for accommodating a mask, a substrate holder for accommodating a substrate, and a projection  
15                   system. This apparatus is characterized in that the projection system is a mirror projection system as described hereinbefore.

                  The mirror projection system may be used in combination with a transmissive mask. Then, the illumination system is situated at one side of the mask holder and the projection system is situated at the other side.

20                   A lithographic apparatus having a shorter build-in length is, however, further characterized in that the mask is a reflective mask, and in that the illumination unit is situated at the same side of the mask holder as the projection system.

                  A reflective mask which is suitable for EUV radiation can be manufactured more easily than a transmissive mask for this radiation.

25                   These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

30                   Fig. 1 shows an embodiment of the projection system according to the invention, and

                  Fig. 2 shows diagrammatically an embodiment of a lithographic apparatus comprising such a projection system.

In Fig. 1, the object plane, in which the mask to be imaged can be arranged, is denoted by the reference numeral 1, and the image plane, in which the substrate can be arranged, is denoted by the reference numeral 2. If the mask is reflective, it is illuminated with a beam  $b$  coming from the right and emitted by a radiation source (not shown). The beam  $b_1$  reflected by the reflective mask is incident on the first mirror 5 of the system, which mirror is concave. This mirror reflects the beam as a converging beam  $b_2$  to the second mirror 6 which is slightly concave. The mirror 6 reflects the beam as a more strongly converging beam  $b_3$  to the third mirror 7. Mirror 7 is a convex mirror and reflects the beam as a slightly diverging beam  $b_4$  to the fourth mirror 8. This mirror is concave and reflects the beam as a converging beam  $b_5$  to the fifth mirror 9 which is convex and reflects the beam as a diverging beam  $b_6$  to the sixth mirror 10. This mirror is concave and focuses the beam as beam  $b_7$  in the image plane 2. The mirrors 5, 6, 7 and 8 jointly form an intermediate image of the mask in the plane 3, and the mirrors 9 and 10 form the desired telecentric image in the image plane 2, i.e. in the plane of the substrate, from this intermediate image.

The pupil of the projection system is situated at the axial position 12. At this position, the beams  $b_2$ ,  $b_3$  and  $b_4$  are separated sufficiently far from each other so that a diaphragm 13 can be placed at this position. As is known, a diaphragm prevents scattered radiation or radiation caused by unwanted reflections from reaching the image-forming beam in an imaging system, so that the contrast of the image formed in the plane 2 could be degraded. Moreover, the diaphragm ensures an identical beam cross-section and NA for all imaging beams so that the power of illumination and the resolution in the image field are constant.

Furthermore, all mirror surfaces of the system shown in Fig. 1 are aspherical. The system is thereby satisfactorily corrected for the desired aperture.

The system is coaxial, which means that the centers of curvature of all mirrors are located on one axis, the optical axis  $OO'$ . From a point of view of assembly and tolerances, this is very advantageous.

The following Table shows the values of the relevant parameters of the embodiment of Fig. 1. These parameters are:

- the distances measured along the optical axis  $OO'$ :

$d_1$ : between the object plane 1 and the mirror 5;

$d_2$ : between the mirror 5 and the mirror 6;

$d_3$ : between the mirror 6 and the mirror 7;

- $d_4$ : between the mirror 7 and the mirror 8;
- $d_5$ : between the mirror 8 and the mirror 9;
- $d_6$ : between the mirror 9 and the mirror 10;
- $d_7$ : between the mirror 10 and the image plane 2,

5 - the radii of curvature measured along the optical axis:

- $R_1$ : of the mirror 5;
- $R_2$ : of the mirror 6;
- $R_3$ : of the mirror 7;
- $R_4$ : of the mirror 8;
- $R_5$ : of the mirror 9,
- $R_6$ : of the mirror 10,

10

- the even terms  $a_2, a_4, a_6, a_8, a_{10}$  and  $a_{12}$  of the known series development:

$$Z = \sum_{i=1}^6 a_{2i} \cdot r^{2i}$$

15 describing the variation of an aspherical surface.

TABLE

	$d_1 = 480.0000 \text{ mm.}$
20	$d_2 = -130.0000$
	$d_3 = 120.0000$
	$d_4 = -410.0000$
	$d_5 = 882.9950$
	$d_6 = -248.8890$
25	$d_7 = 339.1210$
	$R_1 = -504.7420 \text{ mm.}$
	$R_2 = 4047.7788$
	$R_3 = 306.4726$
30	$R_4 = 598.4006$
	$R_5 = 295.0114$
	$R_6 = 349.0336$



	mirror 5	mirror 6	mirror 7
$a_2$	-.99062895E-03	.12350676E-03	.16314718E-02
$a_4$	.19325037E-08	.21184080E-07	-.12937833E-06
5 $a_6$	.22974309E-13	-.52434963E-12	.31503579E-10
$a_8$	.19248731E-18	.44402990E-16	-.10854546E-13
$a_{10}$	.18228577E-22	-.33972268E-20	.35055712E-17
$a_{12}$	-.30564185E-27	.14682141E-24	-.64250987E-21
10	mirror 8	mirror 9	mirror 10
$a_2$	.83556775E-03	.16949095E-02	-.14325312E-02
$a_4$	.48147283E-09	.22268835E-07	.30333192E-08
$a_6$	.15723519E-14	.94568728E-12	.15977007E-13
15 $a_8$	-.18869035E-19	.23709231E-15	.46769410E-20
$a_{10}$	.19431967E-24	-.17020338E-19	-.49062664E-23
$a_{12}$	-.78927285E-30	-.11890177E-23	-.13851990E-27

The system has a magnification M of +0.25, a numerical aperture NA of 0.20 and the circular segment of the image at the area of the image plane 2 has an inner radius of 27.5 mm and an outer radius of 29 mm, so that this plane is scanned with a circular segment-shaped spot having a width of 1.5 mm. The length, or cord, of this spot is of the order of 25 mm. The total length of the system, l in Fig. 1, is approximately 1057 mm. The system is intended for forming an image by means of radiation having a wavelength of 13 nm, and to this end, the mirrors are provided in known manner with a multilayer structure which reflects radiation of this wavelength as satisfactorily as possible. Examples of multilayer structures for this purpose are described in, inter alia, US-A 5,153,898.

Fig. 2 shows very diagrammatically an embodiment of a step-and-scan lithographic apparatus which comprises a mirror projection system according to the invention for imaging a mask pattern, present in a reflective mask 15, on a substrate 20 which is provided with a layer 21 sensitive to EUV radiation. The apparatus comprises an illumination unit 30 which is shown diagrammatically, accommodating an EUV radiation source and an optical system for forming an illumination beam b whose cross-section has the shape of a

circular segment. As is shown in the Figure, the illumination unit 30 can be placed close to the substrate table and the imaging section 9, 10 of the projection system, so that the illumination beam *b* can enter the projection column closely along these elements. The reflective mask 15 to be imaged is arranged in a mask holder 16 which forms part of a mask table 17, with which the mask can be moved in the scanning direction 18, and possibly in a direction perpendicular to the scanning direction, such that all areas of the mask pattern can be positioned under the illumination spot formed by the illumination beam *b*. The mask holder and mask table are shown only diagrammatically and may be implemented in various ways. The substrate 20 is arranged on a substrate holder 22 which is supported by a substrate table (stage) 23. This table can move the substrate in the scanning direction (X direction) but also in the Y direction perpendicular thereto. During scanning, the substrate and the mask move in the same direction. The substrate table is supported by a support 24.

Moreover, the substrate can be moved in the Z direction, the direction of the optical axis *OO'*, and rotated about the Z axis. In sophisticated apparatuses, the substrate can also be tilted about the X axis and the Y axis. For further details of a step-and-scan apparatus, reference is made by way of example to PCT-patent application WO 97/33204 (PHQ 96.004).

The optical free working distance *c*, i.e. the distance between the fifth mirror 9 and the plane of the substrate, is determined by the projection system and, apart from possible mechanical provisions, is relatively large, for example 90 mm. Consequently, optical sensors may be arranged in the space between the fifth mirror and the substrate. Such sensors, which are already used in stepping apparatuses or step-and-scan apparatuses in which a lens system is used as a projection system are, for example, a height and level sensor described in, for example US-A 5,191,200 (PHQ 91.007) and an image sensor described in, for example US-A 5,144,363 (PHQ 90.003).

The projection system is telecentric at the side of the substrate, which has the advantage that magnification errors caused by unwanted movements in the Z direction of the substrate with respect to the projection system are avoided.

The EUV lithographic projection apparatus may be used in the manufacture of ICs but also, for example, liquid crystalline display panels, integrated or planar optical systems, magnetic heads and guidance and detection patterns for magnetic domain memories.

## CLAIMS:

1. A mirror projection system for use in a step-and-scan lithographic projection apparatus for imaging a mask pattern, present in a mask, on a substrate by means of a beam of EUV radiation, which beam has a circular segment-shaped cross-section, said projection system being constituted by six imaging mirrors having ordinal numbers 1-6 from the object side to the image side, the first, the second, the fourth and the sixth mirror being concave and the fifth mirror being convex, characterized in that the third mirror is convex.
2. A mirror projection system as claimed in claim 1, characterized in that the system has a numerical aperture of the order of 0.20 at the image side, a magnification  $M = +0.25$  and a circular segment-shaped image field having a width of 1.5 mm.
- 10 3. A mirror projection system as claimed in claim 1, characterized in that all mirrors have aspherical surfaces.
4. A mirror projection system as claimed in claim 1, 2 or 3, characterized in that the system is telecentric at the image side.
5. A mirror projection system as claimed in claim 1, 2, 3 or 4, characterized in that a physically accessible diaphragm is situated between the second and the third mirror.
- 15 in that a physically accessible diaphragm is situated between the second and the third mirror.
6. A lithographic apparatus for step-and-scan imaging of a mask pattern, present in a mask, on a number of areas of a substrate, which apparatus comprises an illumination unit with a source for EUV radiation, a mask holder for accommodating a mask, a substrate holder for accommodating a substrate, and a projection system, characterized in that the projection system is a mirror projection system as claimed in any one of the preceding claims.
- 20 a substrate holder for accommodating a substrate, and a projection system, characterized in that the projection system is a mirror projection system as claimed in any one of the preceding claims.
7. A lithographic apparatus as claimed in claim 6, characterized in that the mask is a reflective mask, and in that the illumination unit is situated at the same side of the mask holder as the projection system.
- 25 mask holder as the projection system.

1/2

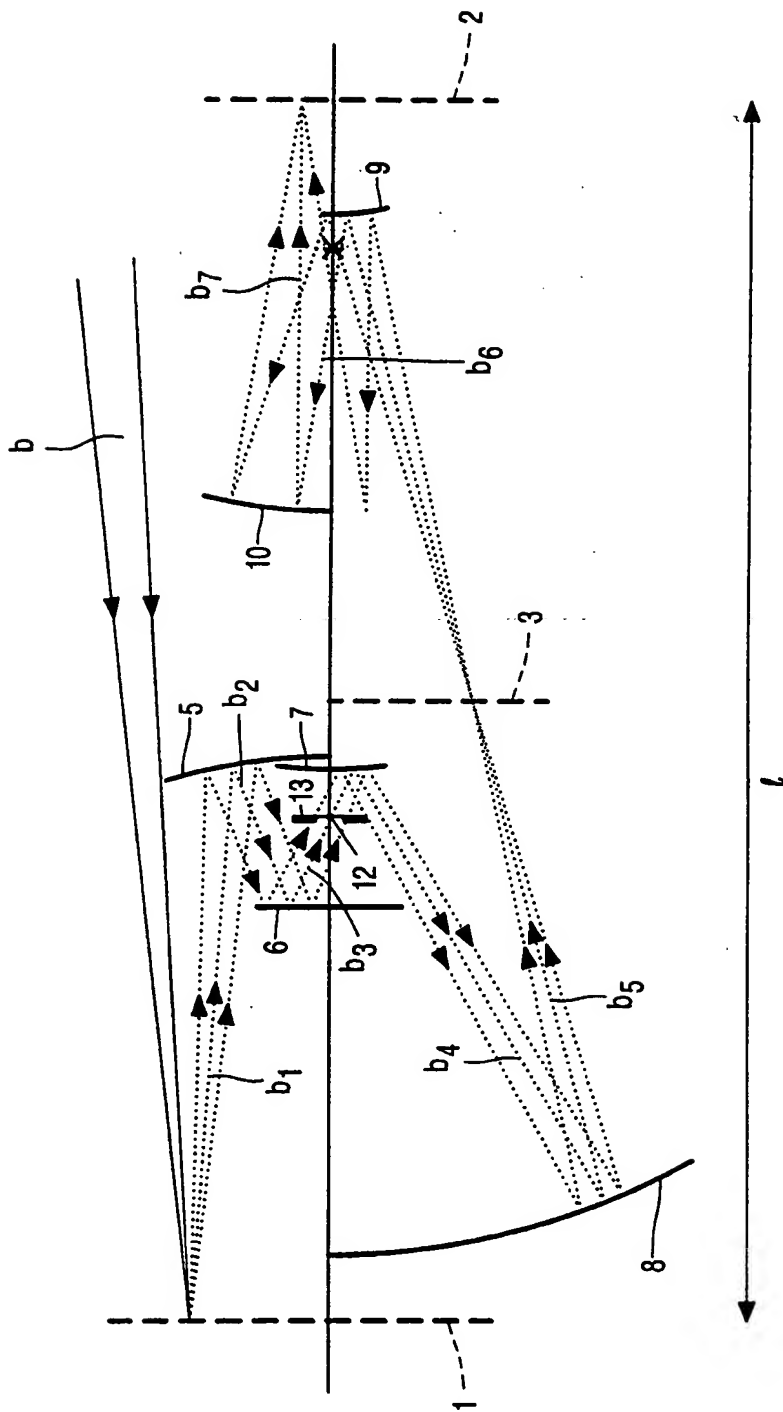


FIG. 1

2/2

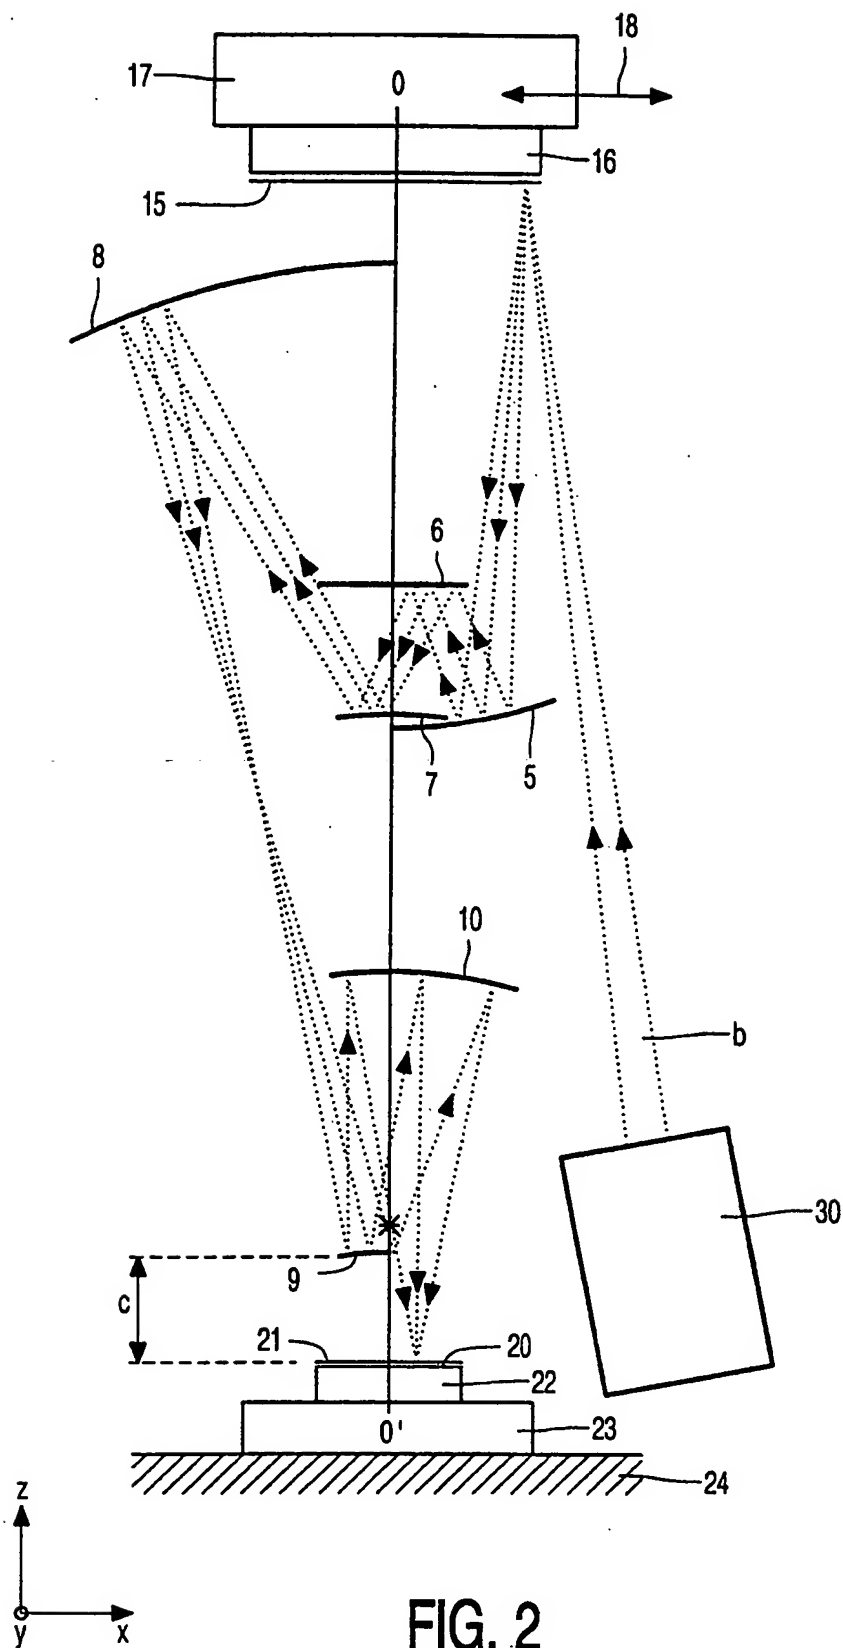


FIG. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 99/00752

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G03F 7/20, G02B 17/06, H01L 21/027

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G02B, G03F, H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

QUESTEL; EDOC, WPIL, JAPIO

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5178974 A (ANDREW M. HAWRYLUK ET AL), 12 January 1993 (12.01.93), column 2, line 62 - line 67; column 3, line 38 - column 4, line 53, figure 1	1-7
A	US 5805365 A (WILLIAM C. SWEATT), 8 Sept 1998 (08.09.98), column 7, line 34 - line 38; column 22, line 8 - line 51, figure 9	1-7
A	US 5303001 A (HWAN J. JEONG ET AL), 12 April 1994 (12.04.94), column 5, line 15 - column 8, line 58, figure 4	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

12 August 1999

Date of mailing of the international patent search report

24 -08- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Bengt Christensson/ELY

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members .

International application No.  
**PCT/IB 99/00752**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5178974 A	12/01/93	US 5176970 A	05/01/93
US 5805365 A	08/09/98	NONE	
US 5303001 A	12/04/94	NONE	